

型号：PE604

Ø 29.75 mm

H 4.52 mm

项 目	版本号
产品参数说明	第三版
功能指示	第三版
机芯外观	第三版
针管高度、外形尺寸参数	第三版
针管参数	第三版
指针参数	第三版
面角定位参数	第三版

产品参数说明

PE604 12_{3/4}^{'''} 石英机芯

3针 四眼/单历（中心大秒扫秒计时\小分计时\星期指针\24小时指针）

1.外观参数

外观尺寸	Ø29.75mm
机芯厚度	4.52mm

2.电子参数

石英振荡频率:	32768Hz
工作电压:	1.25V~1.65V
平均电流:	2.2µA~2.4µA

3.电池参数

类型:	氧化银电池
尺寸:	Ø9.6 X t 2.0(mm)
参考型号:	SR920SW

4.工作温度	-5℃~50℃
--------	---------

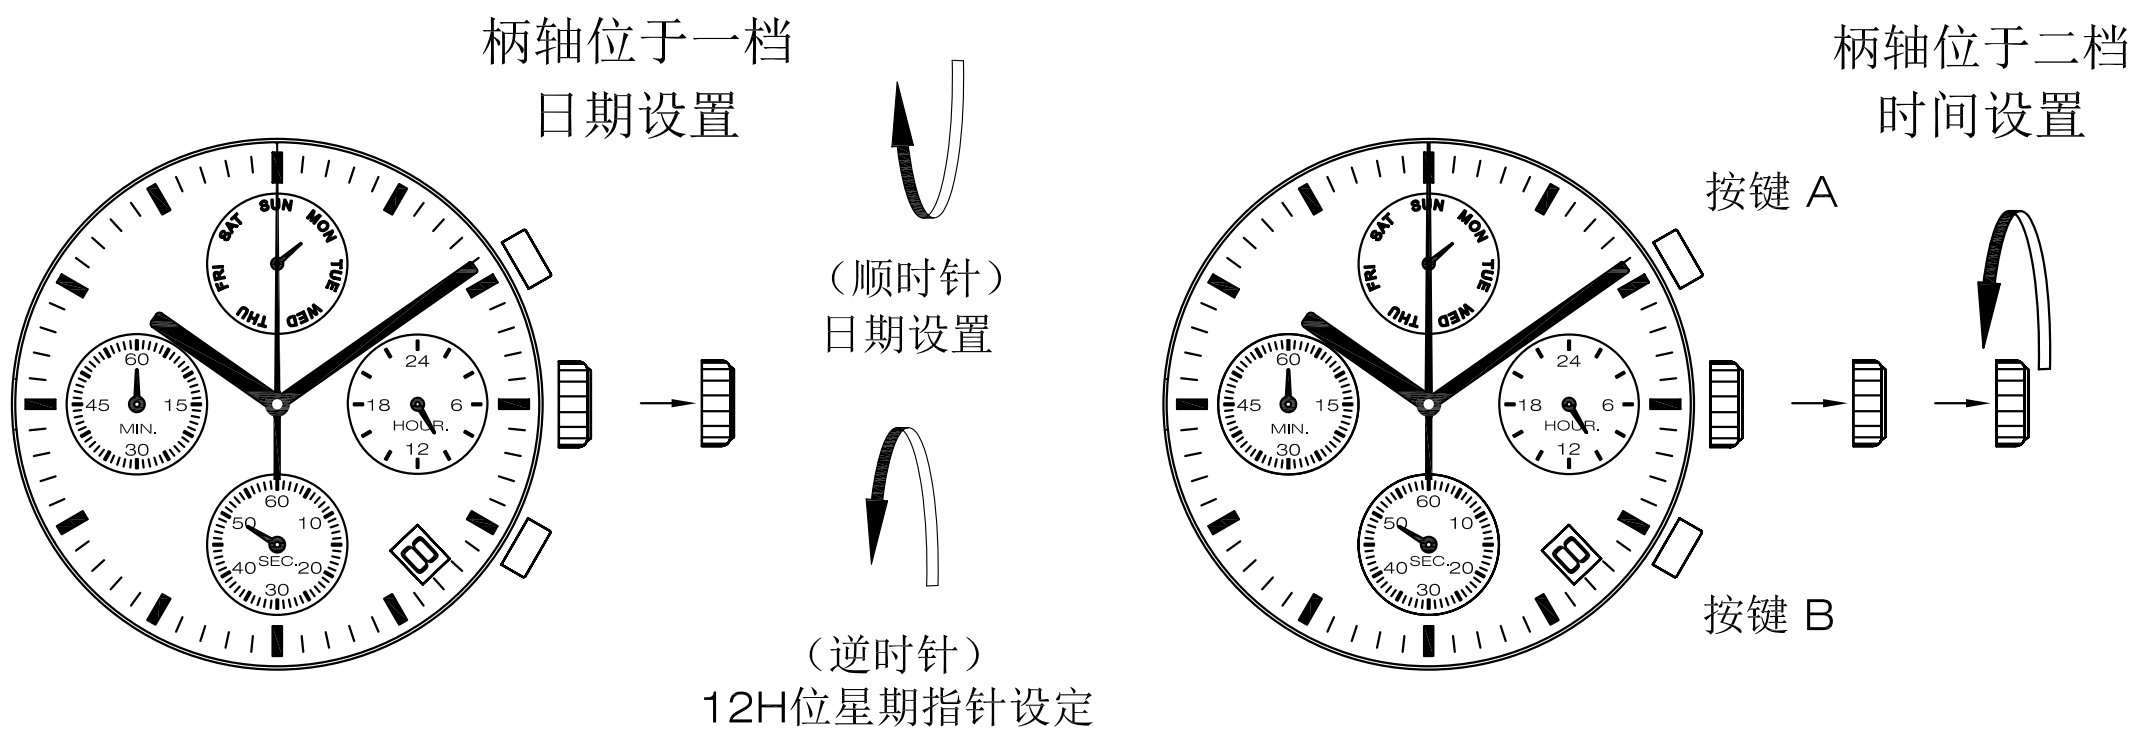
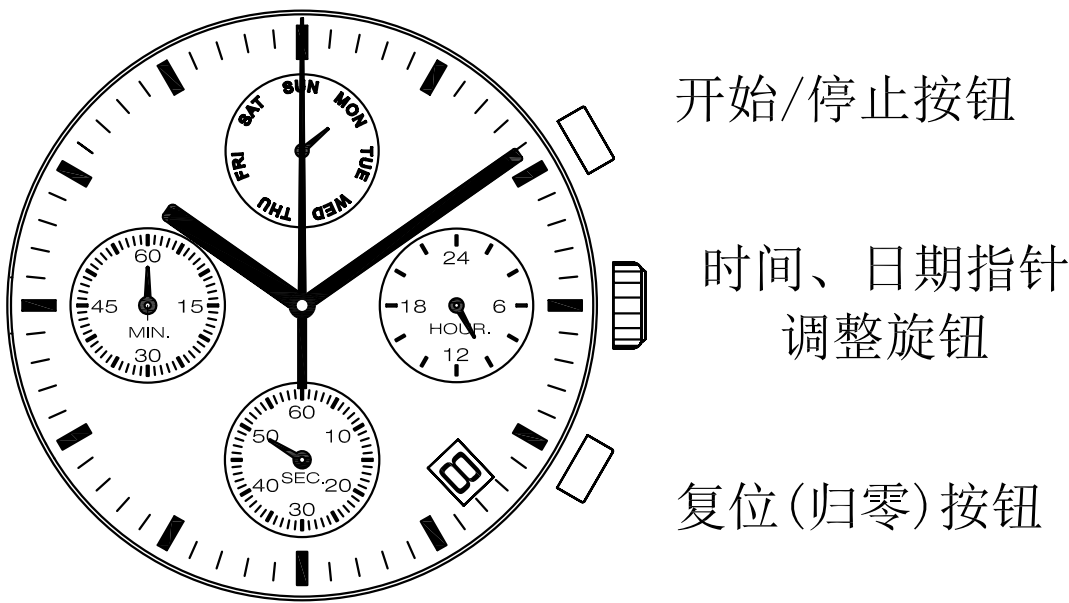
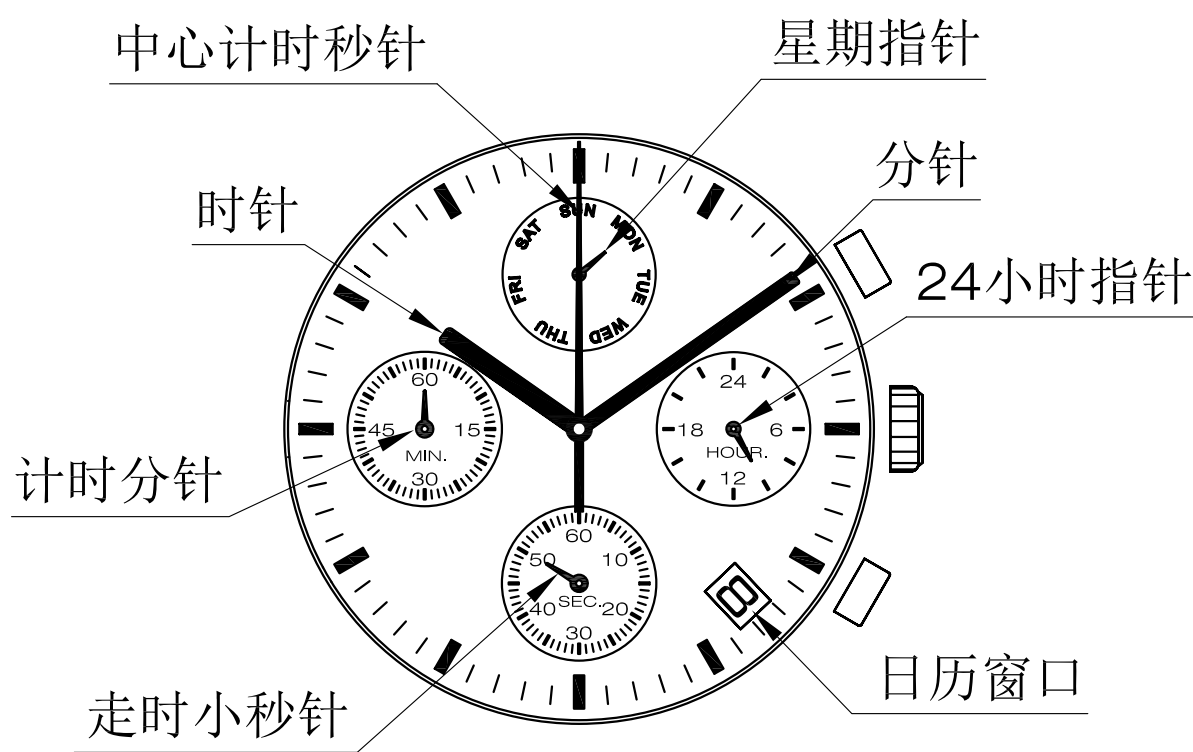
5.常温下月差	≤±45s/M
	≤±30s/M（可定制）

6.秒针输出力矩	≥5.5µNm
----------	---------

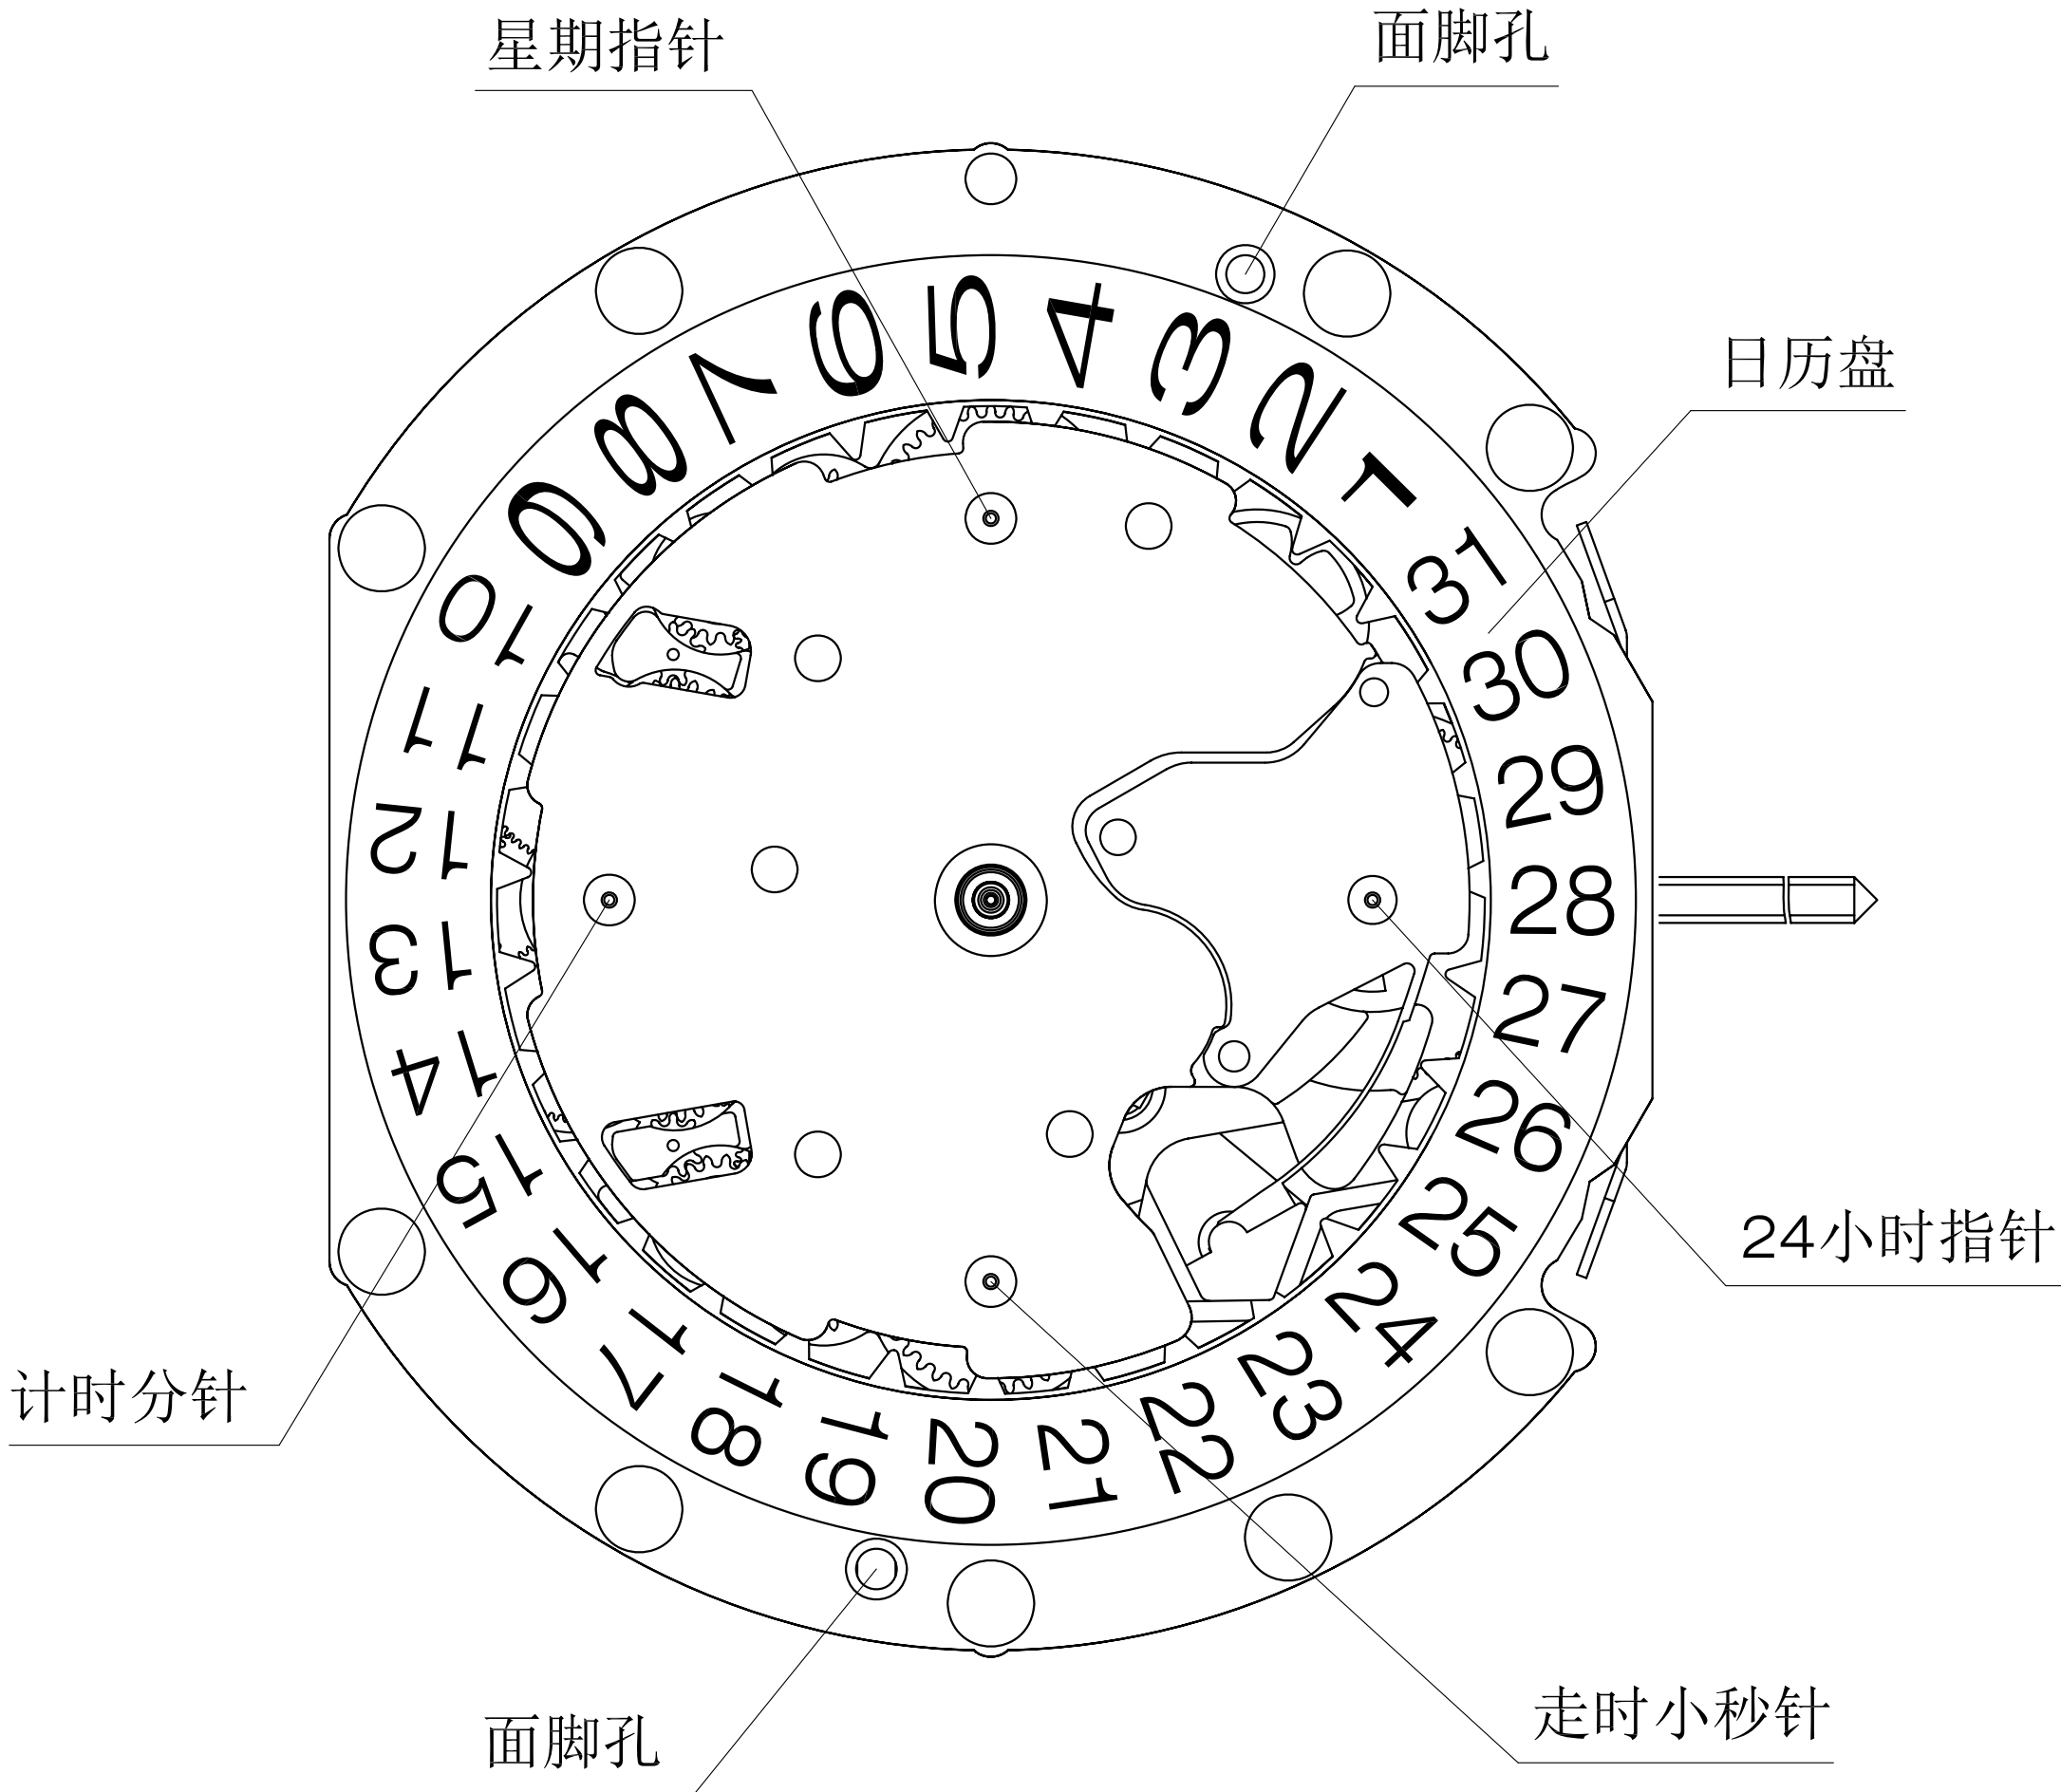
7.表面脚钉	Ø0.75 x L1.8(mm)
--------	------------------

功能指示

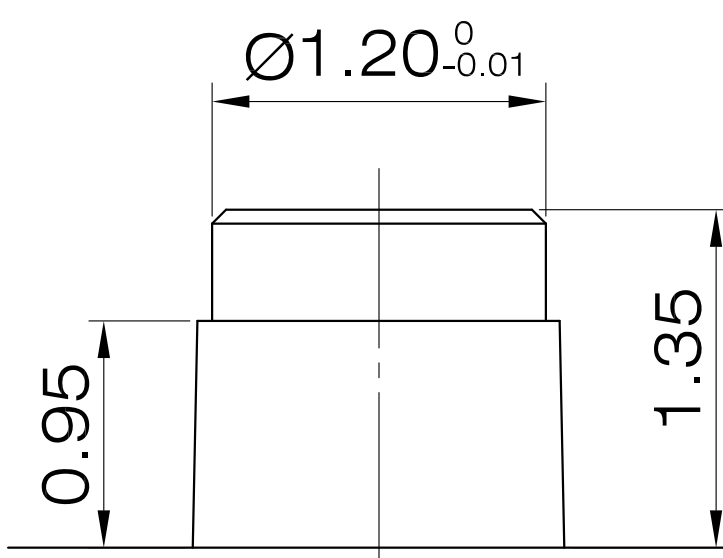
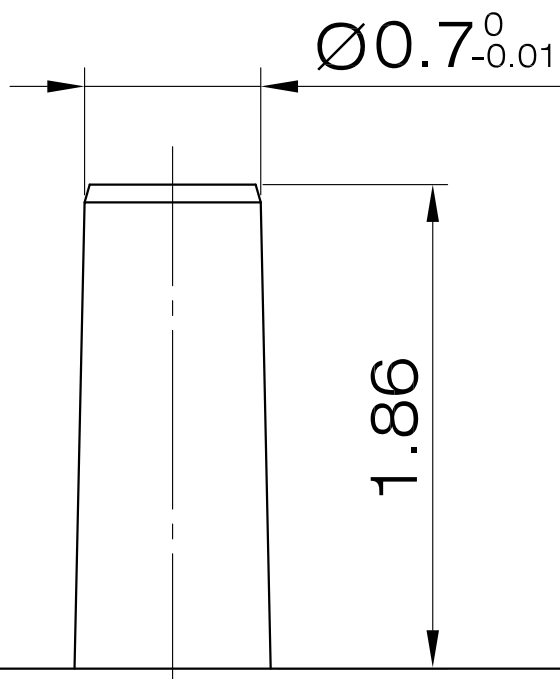
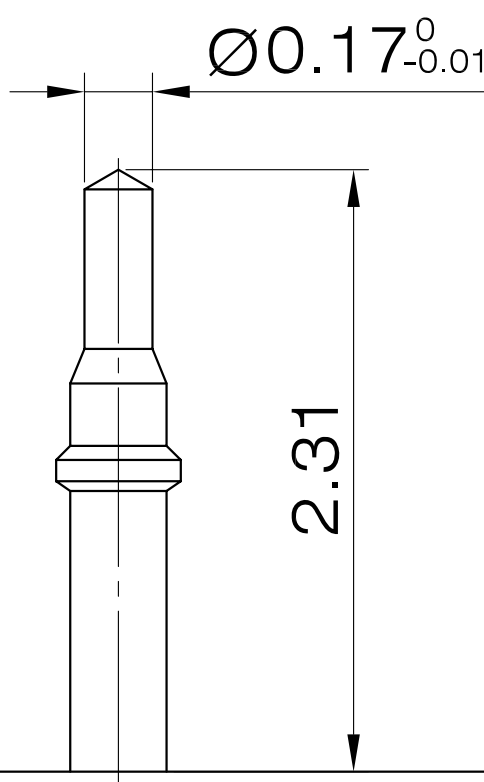
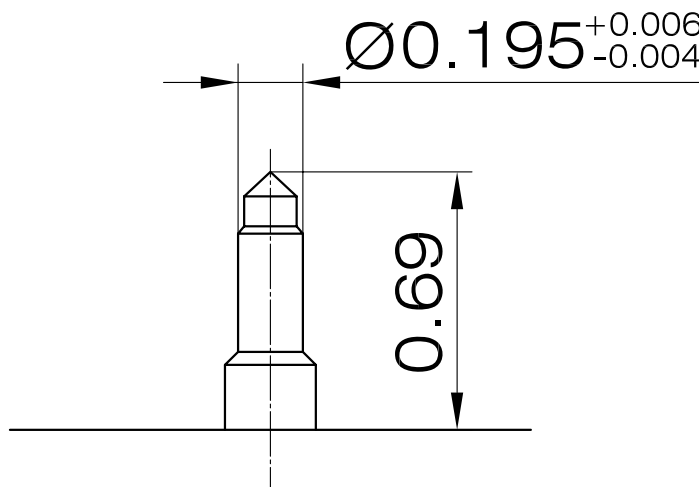
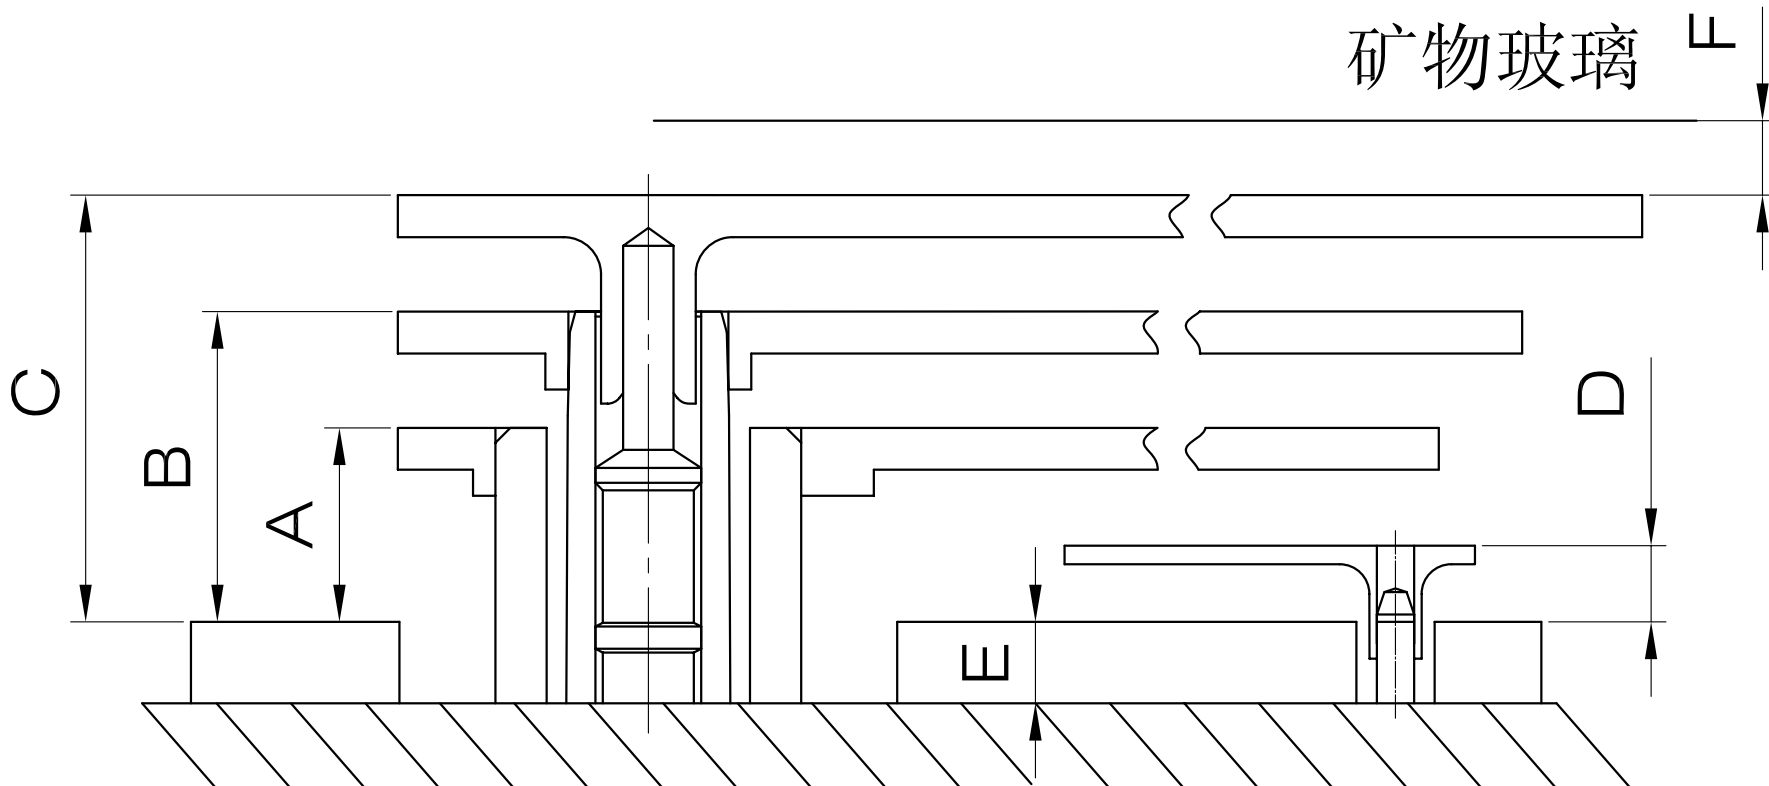
PE604

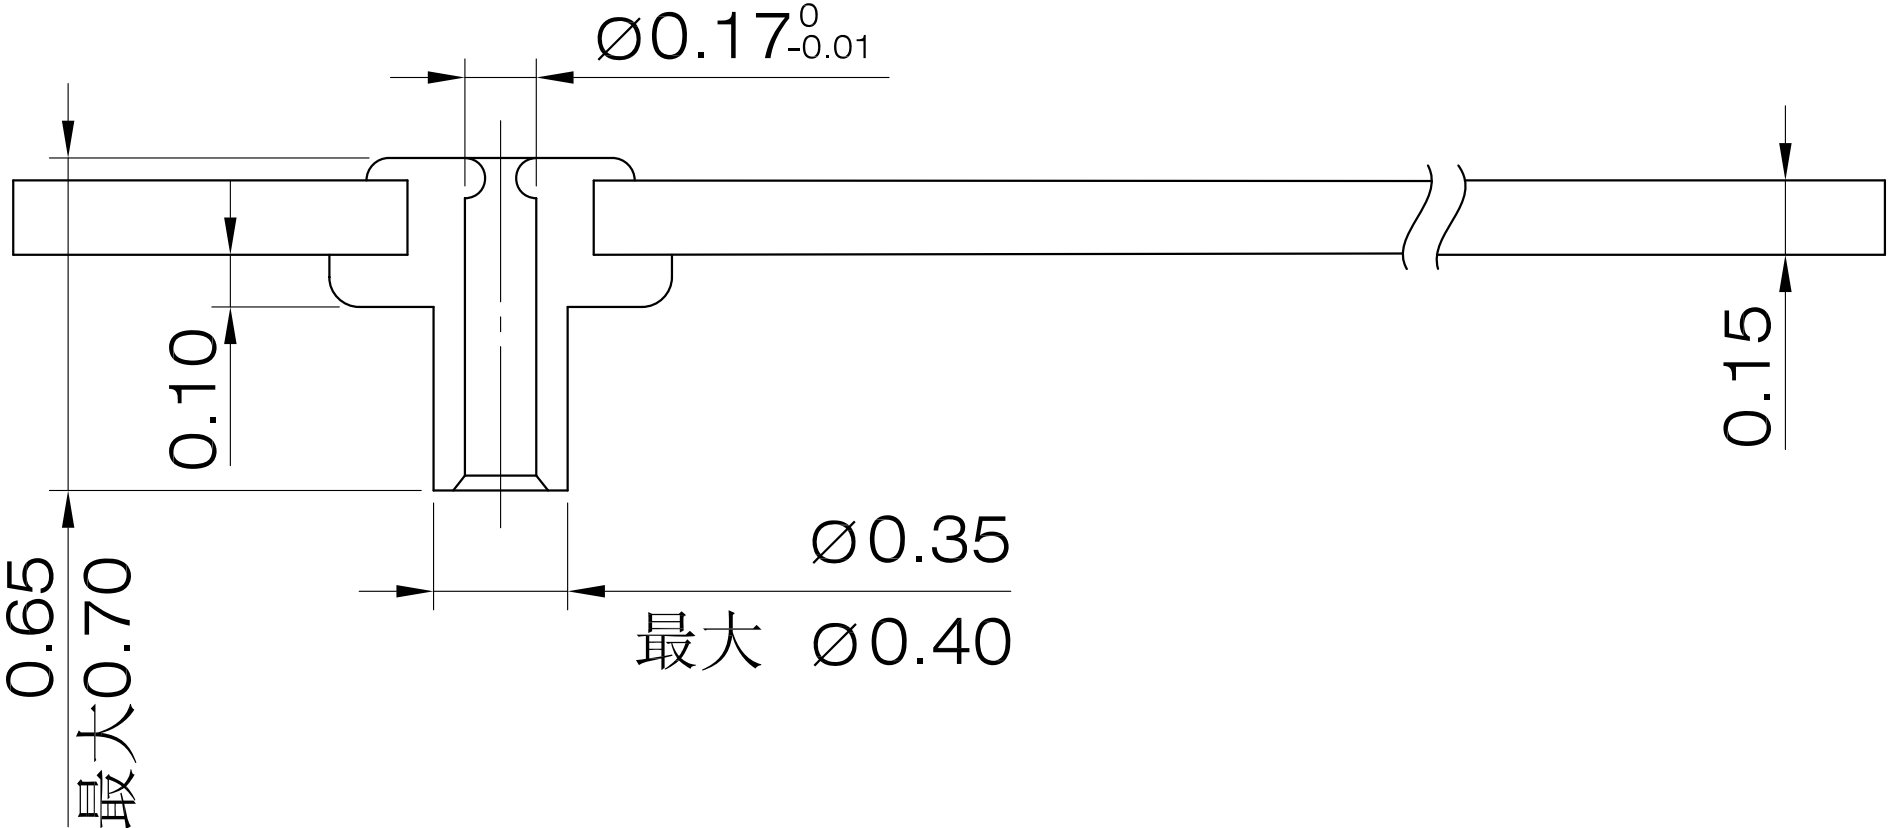
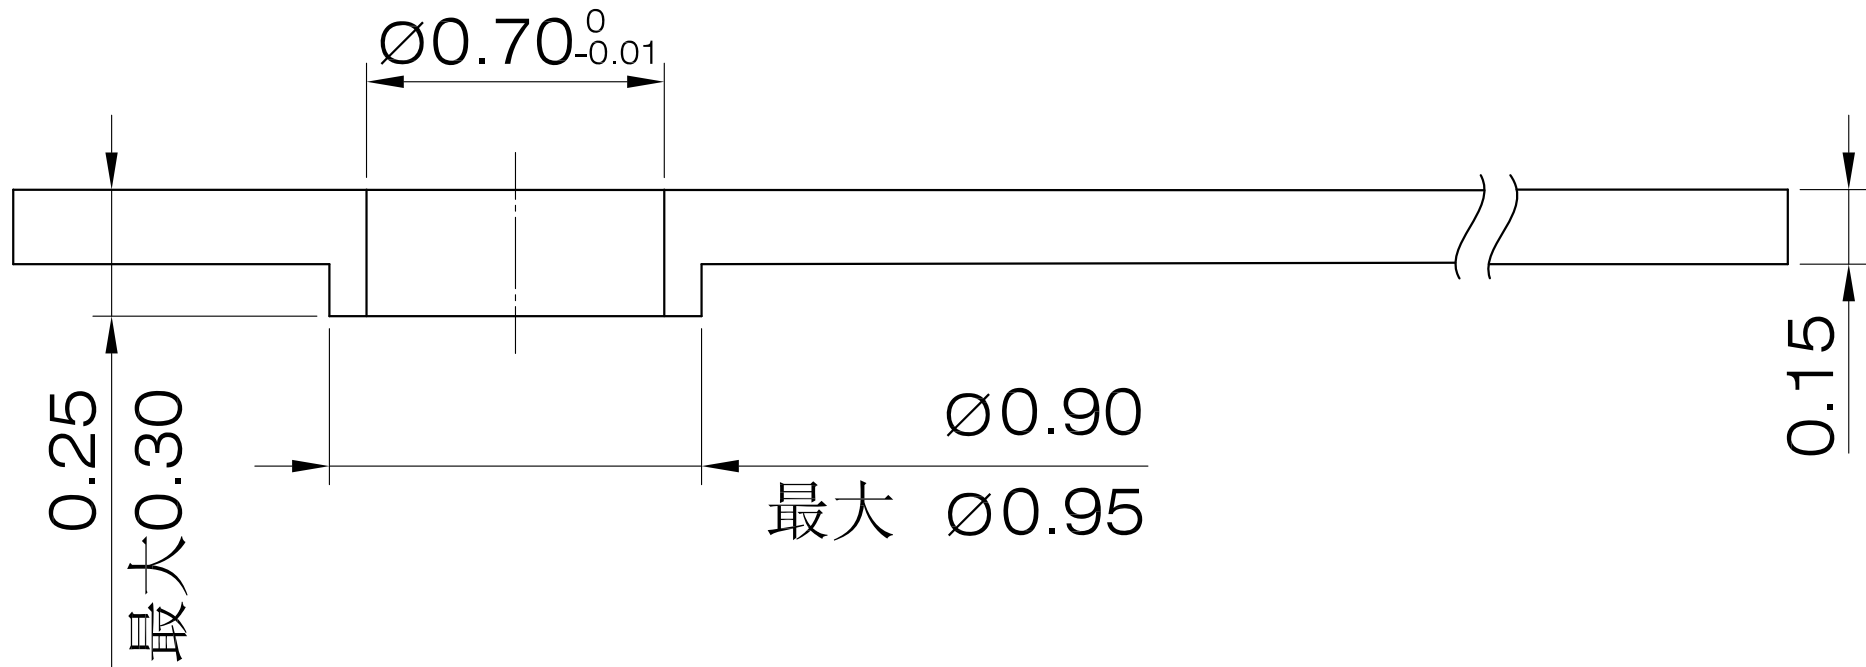
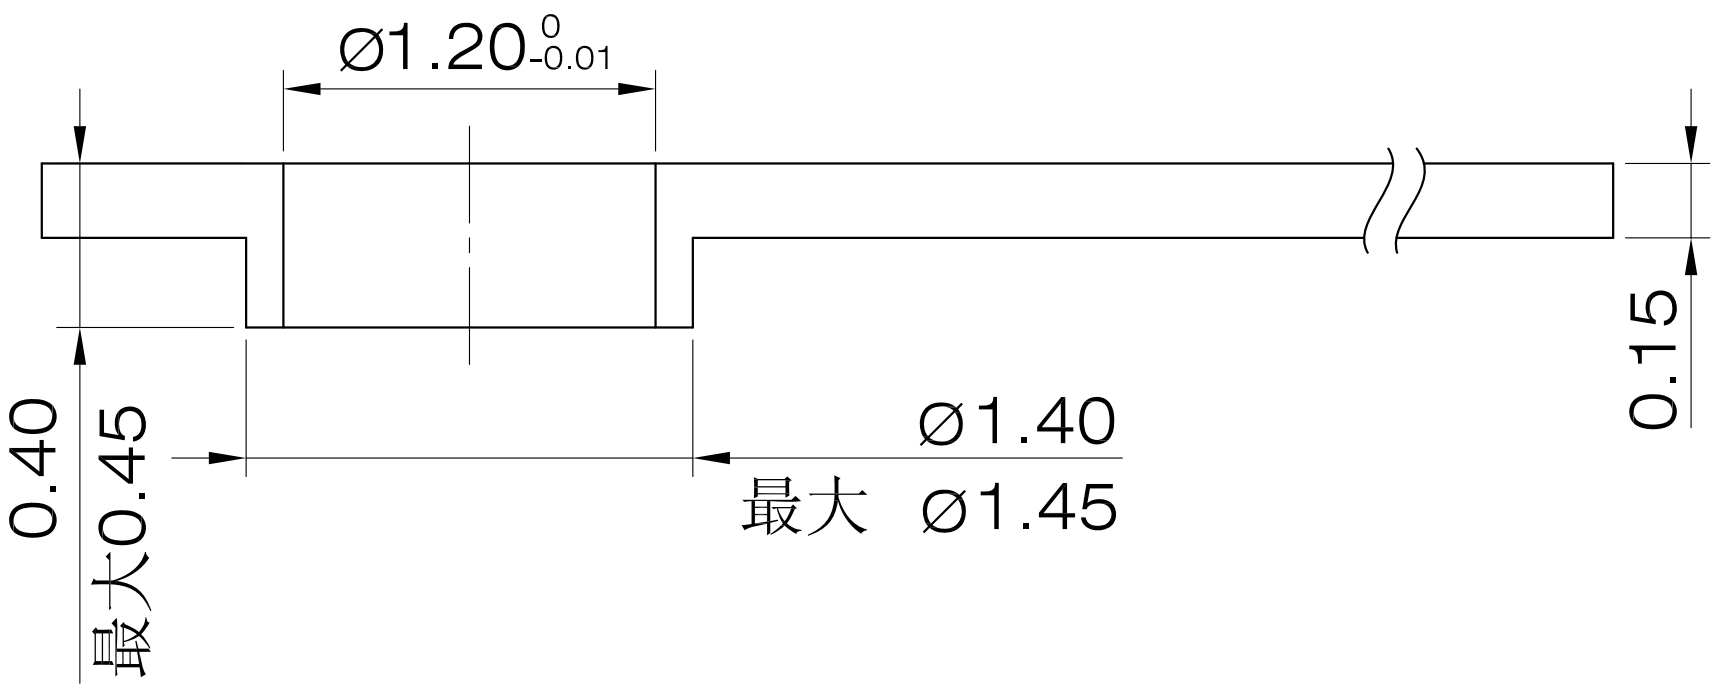
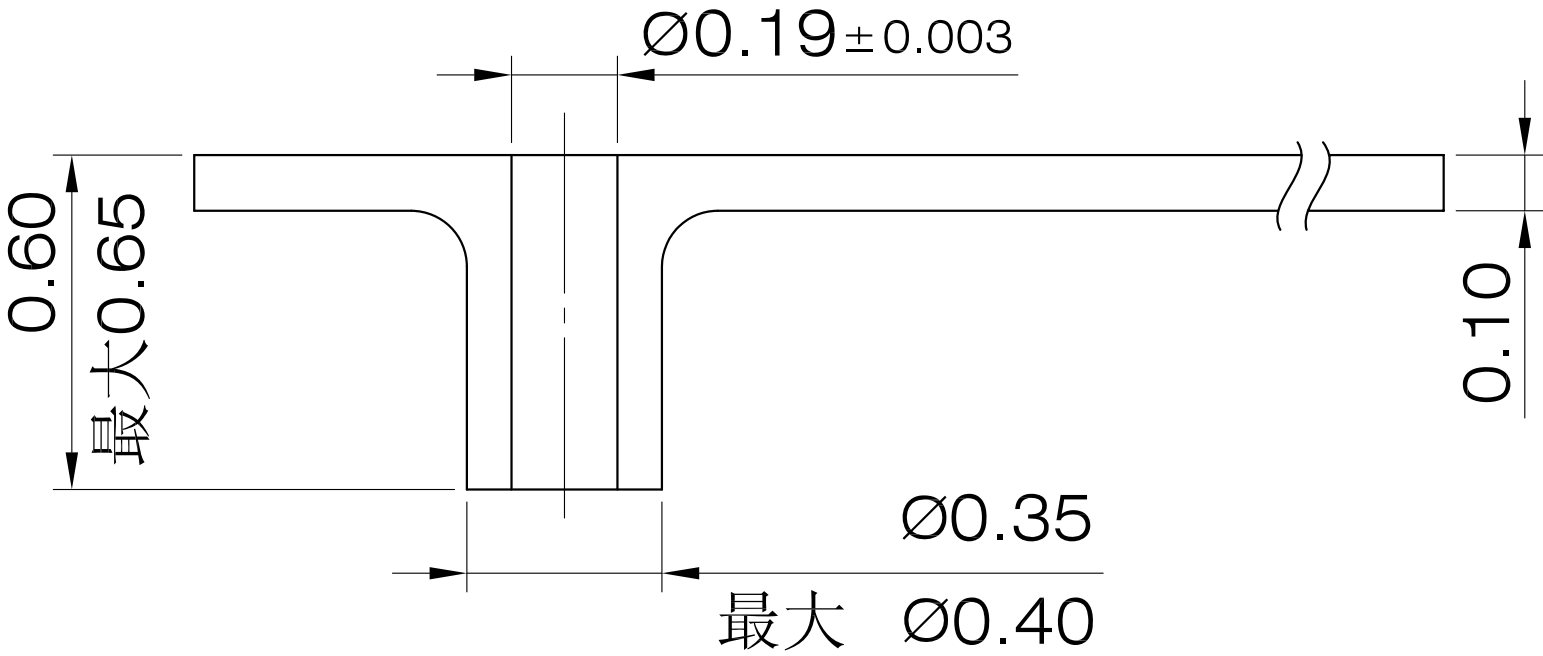


- 调校秒表指针位置
- 1) 拔出表冠至位置二
 - 2) 按 (A) 键重设中央大秒针至"0"位置
 - 3) 按 (B) 键重设计时分针至"0"位置
 - 4) 重设指针完成后, 将表冠推回原位

机芯外观		PE604
		
	比例：4:1 单位：mm	版本：3

针管高度、外形尺寸参数		PE604
The technical drawing consists of two views: a side view (top) and a top view (bottom). Side View Dimensions: - Total height: 4.52 - Base thickness: 1.6 - Main body height: 2.91 (4.52 - 1.6) - Key height: 1.9 - Key depth: 2.47 - Key width: 0.69 - Key spacing: 2.31 - Key height from base: 6.83 Top View Dimensions: - Overall width: 26 - Overall height: 28 - Battery position: 电池位 - Battery diameter: Ø29.5 - Battery hole diameter: Ø29.75 - Battery hole offset: 1.375 - Battery hole angle: 30° - Battery hole radius: R0.5 - Battery hole depth: 0.48 (按键行程) - Battery hole thread: M0.9		
	比例：4:1 单位：mm	版本：3

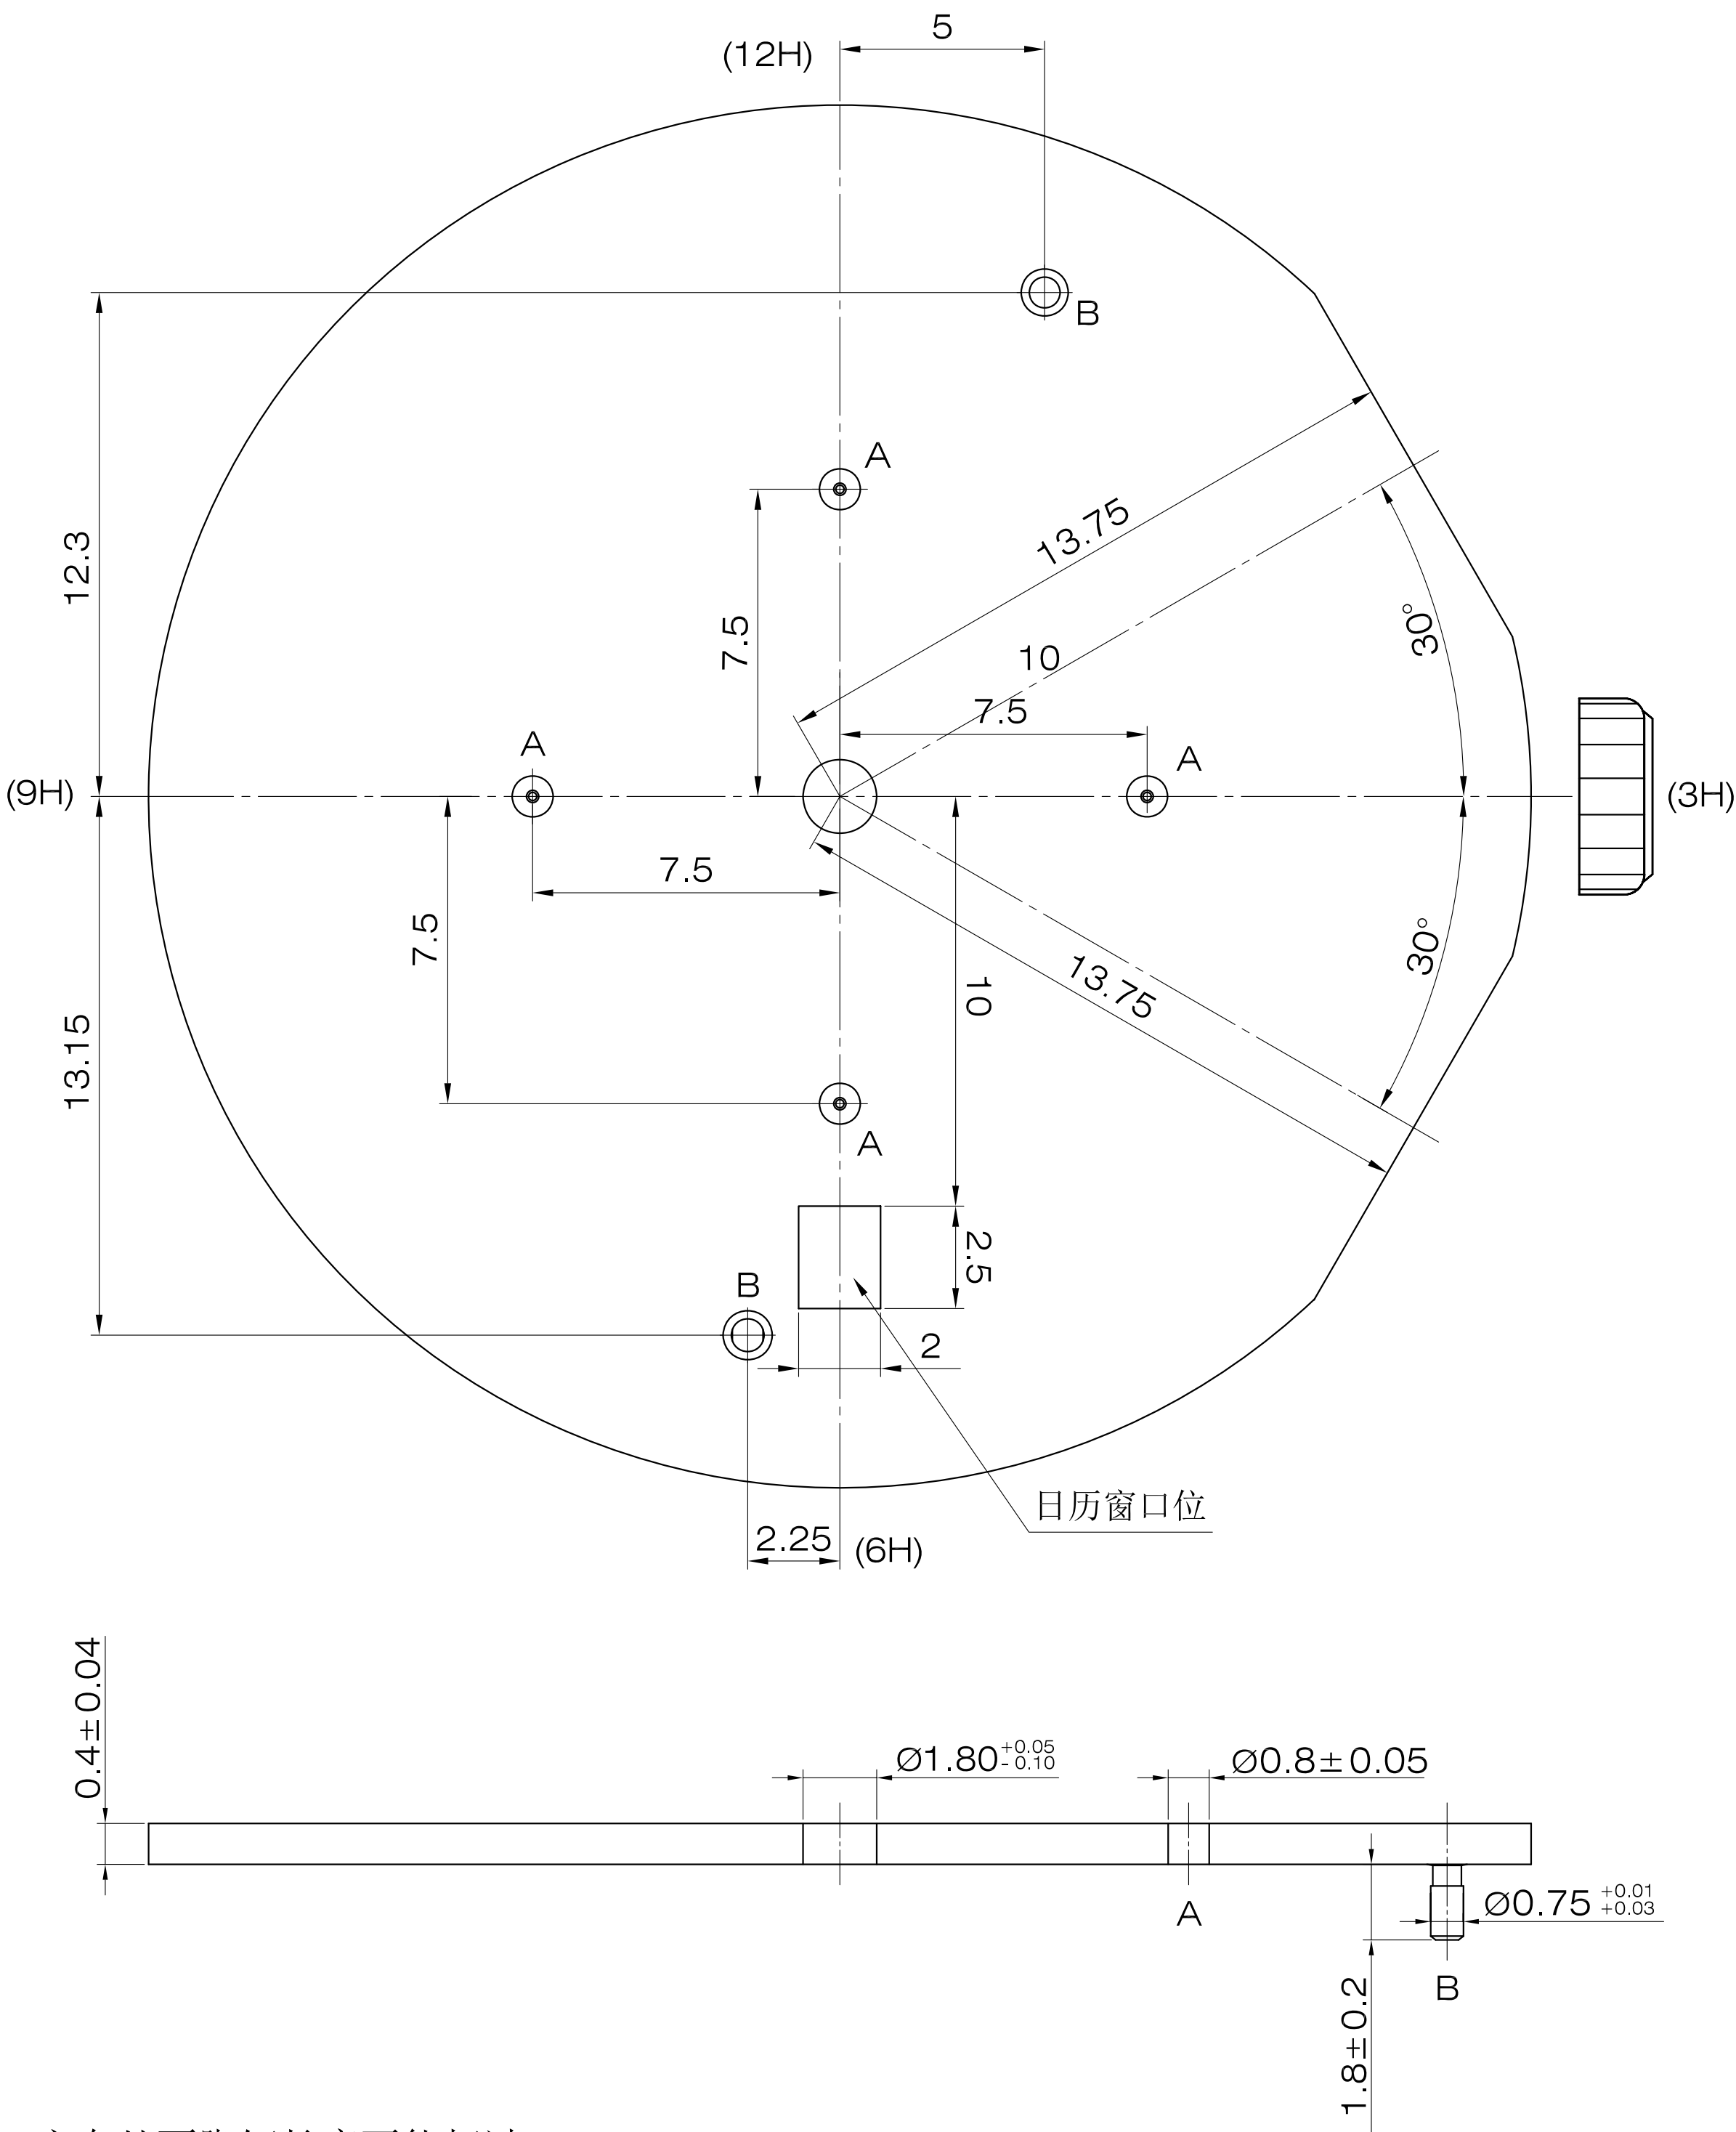
针管参数			PE604																
 时针管			 分针管																
			 秒针轴																
			 旁眼小针轴																
																			
<table><tr><th></th><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th><th>F</th></tr><tr><th>尺寸</th><td>0.95</td><td>1.46</td><td>2.11</td><td>0.45</td><td>0.4</td><td>0.4</td></tr></table>				A	B	C	D	E	F	尺寸	0.95	1.46	2.11	0.45	0.4	0.4			
	A	B	C	D	E	F													
尺寸	0.95	1.46	2.11	0.45	0.4	0.4													
			比例：20:1 单位：mm		版本：3														

指针参数		PE604
秒针		
分针		
时针		
旁眼指针		
比例: 20:1 单位: mm		版本: 3

日历窗口、面脚定位参数		PE604
The drawing shows the top and side views of the PE604 component. The top view is a circular shape with a central hole and several smaller holes labeled A and B. Dimensions include 12.3, 13.15, 7.5, 10, 13.75, 5, 2.25, 2.5, 2, 30°, 46.45°, and 13.75. Labels include (12H), (9H), (6H), (3H), and 日历窗口位. The side view shows a rectangular shape with dimensions 0.4±0.04, 1.8±0.2, and hole diameters Ø1.80^{+0.05}_{-0.10}, Ø0.8±0.05, and Ø0.75^{+0.01}_{+0.03}. Labels A and B are also present in the side view.		
12H方向处面脚钉长度不能超过1.8mm		
	比例： 5:1 单位： mm	版本： 3

日历窗口、面脚定位参数

PE604



12H方向处面脚钉长度不能超过1.8mm

比例: 5:1
单位: mm

版本: 3